


## Detectors & Sensors WIRELESS

## M-BIG I Multi Barrier Infrared Grid

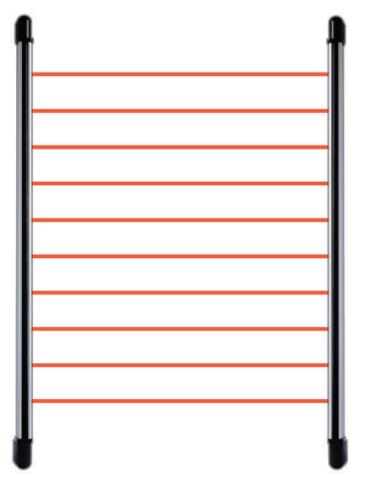

Is a multiple barrier beam comprising an infrared sender and receiver with 6 or 10 active beams. Synchronization is done through a Sync wire or done through the optic beams on the RX and TX. Alarm activation based onDual beam activation, reducing false alarms. Not being able to be cloaked or masked forming an invisible wall rises the level of security. Optional wireless operation with 500m range using localized solar power pack and wireless reporting and control.

6 or 10 Beam available

## **FEATURES:**

- Power supply: 12-18V DC
- · Wide voltage range: 10-18V ac/dc
- · Interface to any alarm panel either wired or through a interface receiver
- · Adjustable response time: .3s to 2s
- IP54 equivalent rating Protected from water spray from any direction.
- Dimensions: 150cm height x 4cm (10 beam)
- · Dimensions: 90cm height x 4cm (6 beam)
- Alarm Output: NC. Contact capacity 30V 2A



+27 11 452 4737



www.mami.co.za sales@mami.co.za



@mamisolutions